

Multiple Order Quartz Waveplates




Bi-refringent materials such as crystal quartz can be used to retard the passage of the extra-ordinary ray resulting in a change of phase difference between the s- and p- states of polarization. By controlling the thickness of plates of quartz it is possible to achieve precise amounts of retardation. A quarter-wave plate has a net retardation of $(2k+1) \pi/2$ and changes the polarization state from linear to circular or vice-versa. A half-wave plate has a net retardation of $(2k+1)\pi$ and rotates the plane of polarization by 90° .

These waveplates are quartz plates with known amounts of retardation at a specific wavelength. The retardation tolerance is $\lambda/500$. They are available un-mounted or mounted in a metal cell.

It is also possible to provide dual wavelength

waveplates, which transmit two harmonic wavelengths so they emerge with crossed linear polarization. These have half wave retardation at λ_1 and one wave retardation at λ_2 . A full waveplate has a net retardation of $2k\pi$ and rotates the plane of polarization by 180° . A

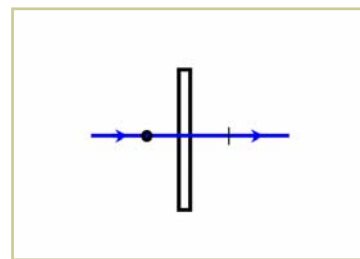

half-wave plate has a net retardation of $(2k+1)\pi$ and rotates the plane of polarization by 90° .

Waveplates are normally provided as circular plates of 10, 20 or 30 mm diameter, providing a clear aperture of 8, 18 and 25 mm respectively when mounted. Inch sizes can also be supplied.

Each plate has a small flat indicating the direction of the optic axis. The nominal thickness of these plates is 1 mm. They are anti-reflection coated at the design wavelength.

Waveplates can be supplied for any wavelength in the range 248 – 2500 nm.

Typical Specifications

Material:	Crystal Quartz
Cell:	Aluminium (black anodized)
Transmitted Wavefront:	$\lambda/10$ @ 633nm
Retardation Tolerance:	$\lambda/500$ @ 20°C
Surface quality:	10-5
Diameter:	+0.0 / -0.2 mm
Thickness:	~ 1 mm
Clear aperture:	>85%
Parallelism:	1 arcsec
A/R coating:	R <0.25% per surface

To request a quote or to order, please specify:

Quantity — Single or Dual — Diameter — Wavelength(s) (λ_1 & λ_2) — Mounted / Un-mounted

Optarius

PO Box 2271
Malmesbury SN16 9FA
United Kingdom

Optical Components

Phone: +44 1666 575185
Fax: +44 1666 577424
Email: optarius@optarius.com
Web: www.optarius.com

For a quotation — please phone, fax or email us with details of your requirements.